



Valve Regulated Lead-Acid Rechargeable Battery




BP8-6

The battery is constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glass-mat separator and plates, the battery can be used in any direction and position (but upside-down should be avoided) without leakage.


PERFORMANCE SPECIFICATIONS

Nominal Voltage(V).....	6 volts(3cells in series)
Nominal Capacity(Ah)	
20 Hour rate F.V.(1.75V/cell) (400A to 5.25volts)	8.0Ah
10 Hour rate F.V.(1.75V/cell) (760A to 5.25volts)	7.6Ah
5 Hour rate F.V.(1.75V/cell) (1360A to 5.25volts)	6.8Ah
1 Hour rate F.V.(1.55V/cell) (4800A to 4.65volts).....	4.8Ah
Approximate Weight.....	1350g(2.98lbs.)
Terminal	
Standard.....	Type T1
Optional.....	Type T2
Internal Resistance (Fully Charged Battery).....	≤12.5m Ω
Maximum Discharge Current For 5 sec.(A).....	120A
Maximum Charge Current(A).....	2.40A
Ambient Temperature	
Charge.....	0°C(32°F)~40°C(104°F)
Discharge.....	-20°C(-4°F)~50°C(122°F)
Storage.....	-20°C(-4°F)~40°C(104°F)
Vibration test:	
Frequency: 16.7Hz	
Amplitude: 4mm	
Vibrate the battery horizontally or vertically for 60 minutes. The battery have no abnormality.	
Case.....	ABS: UL 94-HB
Dimension(mm/inch)	
Length ±1.5mm.....	151/5.94
Width ±1.5mm.....	34/1.34
Container Height ±1.5mm.....	94/3.70
Total Height ±2mm.....	100/3.94
Application.....	Electronic Toy-Cars.Emergency Lights, Rechargeable Flashlights, UPS, Fans

BP8-6 Battery discharge characteristics (25°C/77°F)

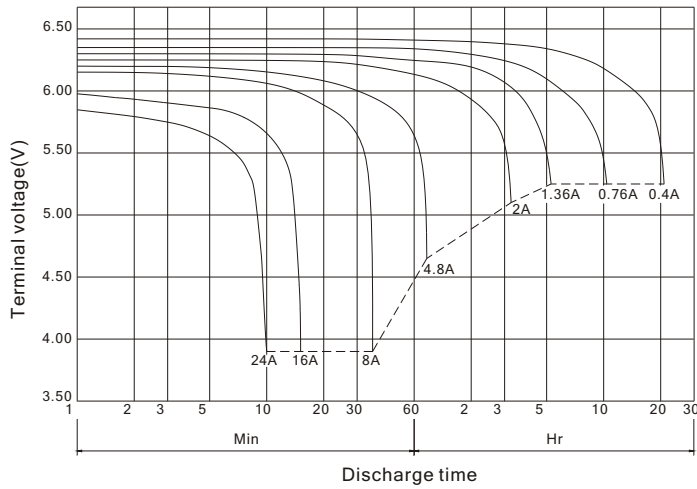

Battery Charging Characteristics (Typical example of the charge characteristic for the standby use)

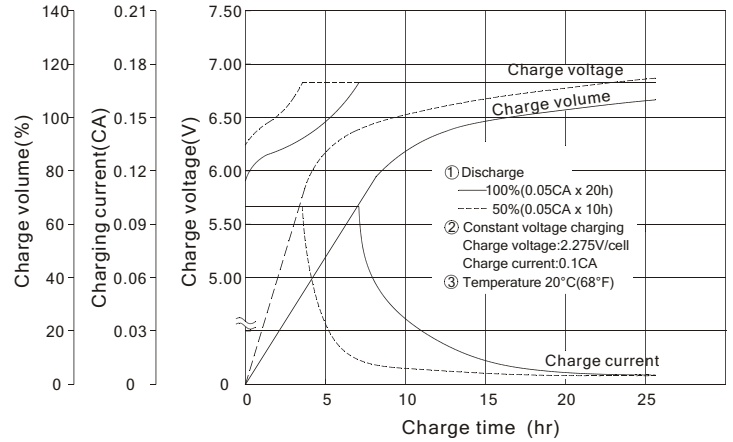


Charging Procedure



Application	Charging method	Charging Voltage at 20°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 20°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

Battery Life Characteristics of Cyclic Use

Testing Conditions : Discharge Current : 0.25C Amp (F.V. 1.7V/cell)
 Charging Current : 0.1C Amp
 Charging Volume : 120% OF Discharge Capacity
 Ambient Temperature : 20 °C (68 °F)

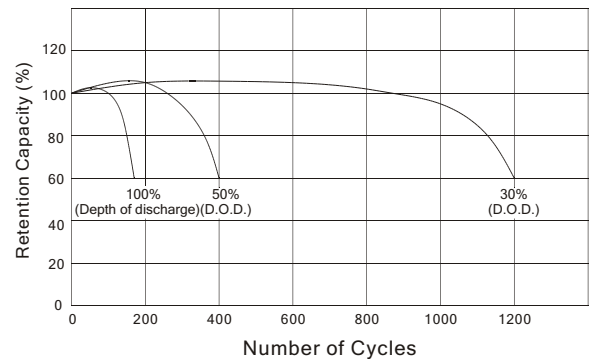


OUTER DIMENSIONS mm(inch)

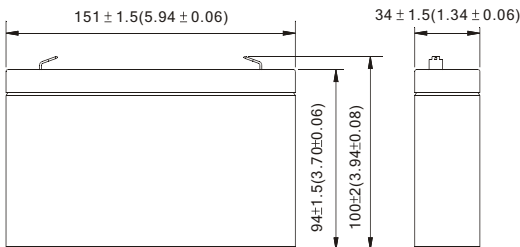


TERMINAL TYPE mm(inch)

Terminal T1




Terminal T2



Constant power discharge characteristics at 25°C/77°F

Final Voltage	Discharge time									
	5Min	10Min	15Min	30Min	1Hr	3Hr	5Hr	10Hr	20Hr	
5.40V	144.6	106.5	85.3	50.8	29.1	11.7	8.0	4.5	2.4	
5.25V	167.4	115.3	89.2	52.7	30.0	11.9	8.2	4.6	2.4	
5.10V	177.9	119.5	92.0	53.9	30.5	12.0	8.2	4.6	2.4	
4.95V	185.8	122.4	94.1	54.7	30.9	12.1	8.2	4.6	2.4	
4.80V	192.0	124.8	96.0	55.2	31.2	12.2	8.3	4.6	2.4	

TERMINAL POSITION



B.B. BATTERY CO., LTD.

Web Site: <http://www.bb-battery.com>

USA:
 B&B BATTERY(USA) INC.
 6415 RANDOLPH ST.COMMERCE,
 CA,90040 U.S.A.
 TEL:1-323-278-1900.1-800-278-8599
 FAX:1-323-278-1268
 E-Mail:sales@bb-battery.com

EUROPE:
 B&B BATTERY(EUROPE) B.V.
 3 WIJNGAARDVELD, 9300 AALST,BELGIUM
 TEL:(00)32-53781567
 FAX:(00)32-53781567
 E-Mail:hansdevriese@bb-battery.com

CHINA FACTORY:
 B.B. BATTERY CO., LTD.
 CHENG DONG TRIAL AREA,HUANG GANG,
 RAOPING, GUANG DONG,CHINA,515700
 TEL:86-768-7601001-2
 FAX:86-768-7601469
 E-Mail:maggy@bb-battery.com

HONG KONG:
 NATIONAL TRADING LTD.
 TEL:852-2301-3800
 FAX:852-2739-1182
 E-Mail:bbhk@hkstar.com

JAPAN:
 B&B BATTERY(JAPAN) CO., LTD.
 1375-11 NARAHARA-MACHI,HACHIOJI,
 TOKYO 193-0803,JAPAN.
 TEL:81-426-25-6375
 FAX:81-426-25-6375
 E-Mail:miyata@bb-battery.com

TAIWAN:
 B.B. BATTERY(TAIWAN) CO., LTD.
 TEL:886-6-502-5150
 FAX:886-6-589-8087
 E-Mail:maggy@bb-battery.com

