



## PST-DCZ0930

DC/DC converter with wide input voltage range and 9VDC 3A output.

### Electrical Specifications

Output Voltage 9 VDC  $\pm$  0.1 VDC

Maximum steady state input voltage range 8 VDC to 41 VDC

Nominal continuous output current 3.0A

Maximum continuous output current with input below 20 VDC 3.0A

Line regulation  $\pm$  0.5%

Load regulation  $\pm$  1.0%

Minimum input voltage for load regulation of 10 %, see Note 1

7 VDC (1 minute duration)

Maximum output ripple 10mV p-p

Maximum switching noise level 90mV p-p

Maximum operating temperature range - 40C to 75C (- 40F to 167F)

Maximum storage temperature range - 40C to 90C (- 40F to 194F)

Minimum efficiency, see Figure 1 78% 24 VDC input, 0.15A load

Maximum efficiency, see Figure 1 89% 12 VDC input, 1.0A load

### Protection

**Overload protection** If there is a short circuit connection or other overload connection is sensed, the unit will automatically limit the output current and, depending on severity, will go into a hiccup mode. See Note 2.

**Over temperature protection** If an extreme over temperature condition occurs the unit will shut down until the temperature is reduced. See Note 3.

**Reverse polarity protection** If an in-line 4A fast acting fuse is connected as shown in Figure 2,

then the unit will be protected from reverse polarity connection. If the fuse is used and there is a reverse polarity connection, the fuse will blow and protect the unit from damage. See Note 4.

PowerStream Technology PST-DCZ0530 3/12/08

www.powerstream.com Rev. 1 Page 1 of 4

### Physical Specifications

Weight 108 grams or about 3.8 ounces

Dimensions Length

Width

Height

120mm (4.73 inches)

55mm (2.17 inches)

33mm (1.30 inches)

Connections Input connector

Output connector

2 position screw terminal block

2 position screw terminal block

Note 1:

Extended operation at voltages less than 8.0 VDC is not recommended although the unit will work at voltages lower than this with reduced load regulation. With voltages lower than 7.0 VDC, load regulation is rapidly reduced.

Note 2:

If an overload is sensed, the unit will automatically limit the output current and reduce the output voltage. If the output voltage is excessively reduced to limit current, the unit will go into a hiccup mode and wait until the overload is removed to restore power. This dual-mode overload protection system allows the unit to be protected from continuous short circuit connection and other overload conditions.

Note 3:

Extended operation at temperatures above 75C can damage the unit and will void the warranty.

Note 4:

If the in-line 4A fast-acting fuse is not connected as shown in Figure 2, a reverse polarity connection can damage the unit and will void the warranty

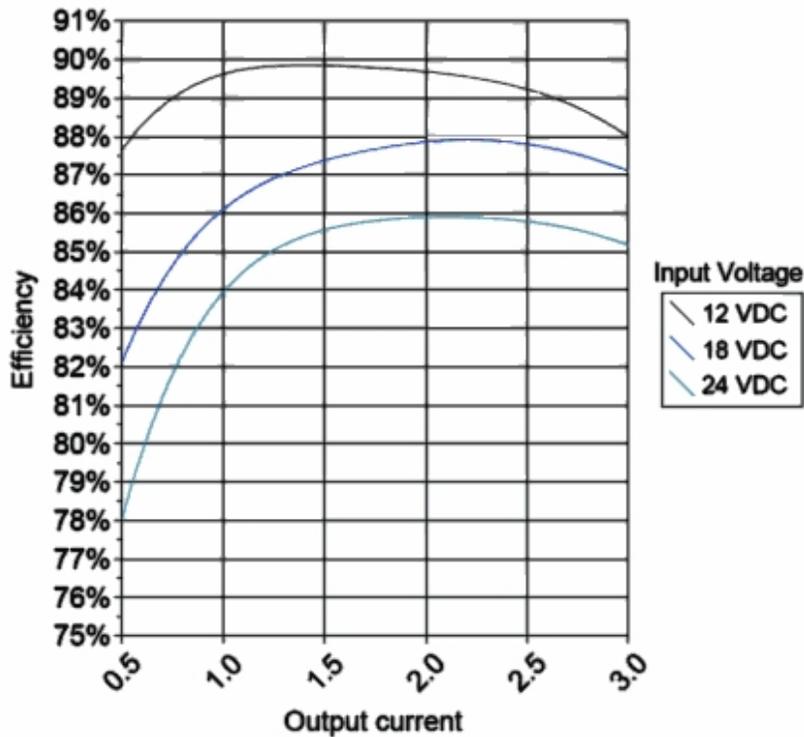


Figure 1

Typical efficiency curves

PowerStream Technology PST-DCZ0930 3/12/08

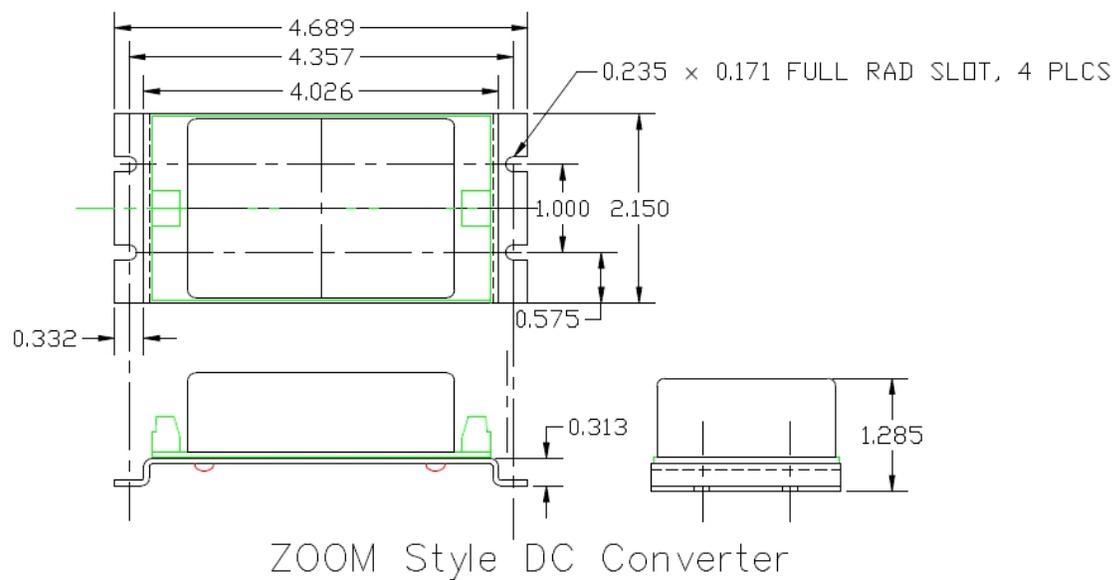


Figure 2. Dimensioned drawing.



Figure 3  
Connection diagram

**Warning: For full warranty protection please use a 4A fast-acting fuse as shown. See Note 4.**